


LIGHT DUTY SCISSOR LIFTS

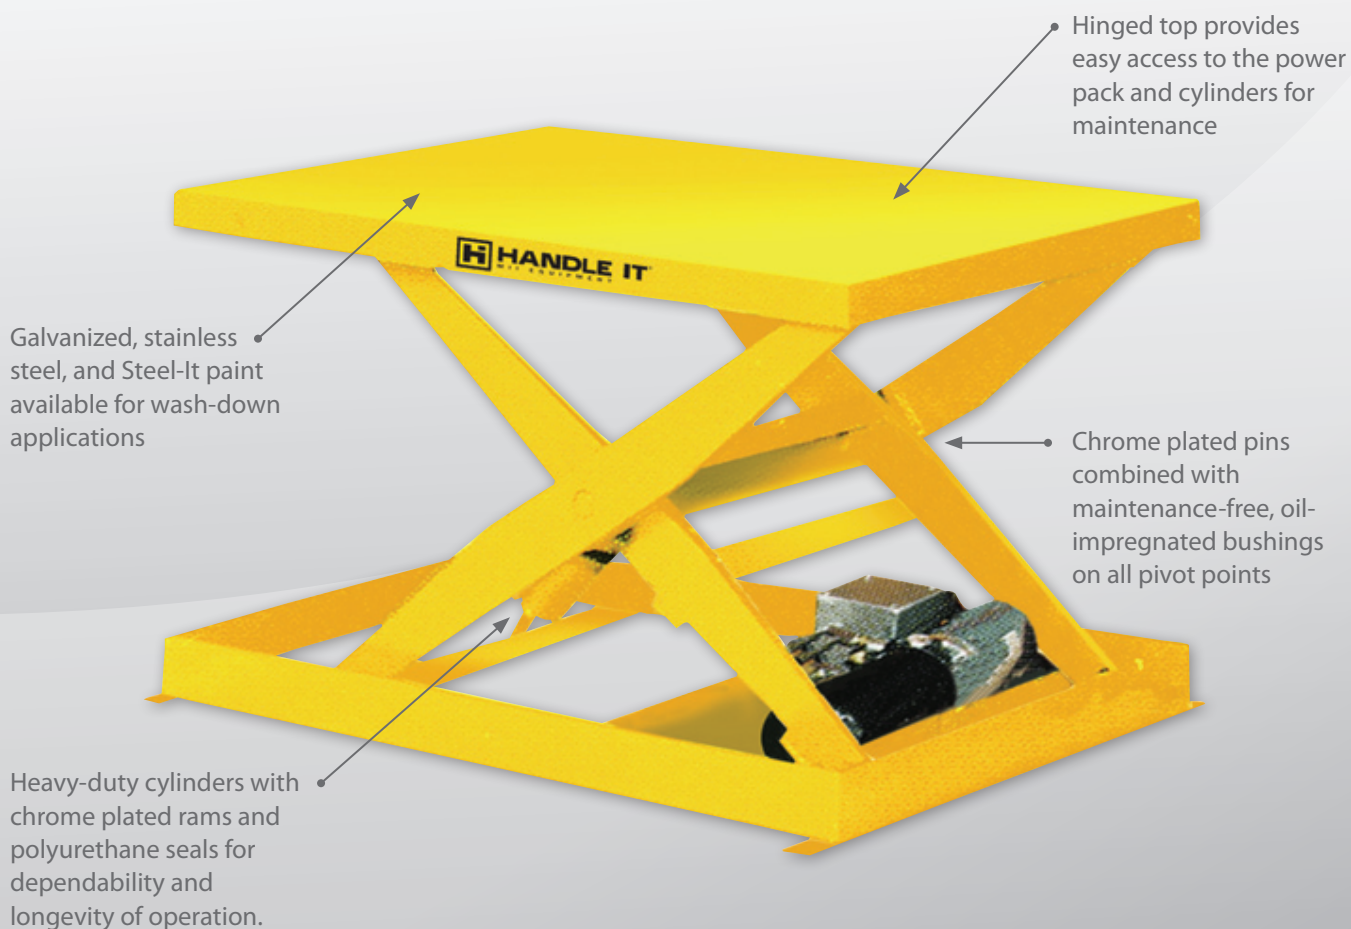

Features and Benefits

- Safety velocity fuse at the cylinder will stop the travel of the lift should a hose failure occur
- Compact design with a 5 ½" lowered height of stationary lifts and 9 ¼" for portable lifts
- Adjustable flow control valve to reduce lowering speed for delicate loads
- Options for these units include stainless steel or special paints, oversized platforms to 48" x 72", turntables, covered foot controls, AC electric for portable units, limit switches, bellows, safety skirts, or tape switches, and Air/Hydraulic power