



# HANDLE·IT®

## HEAVY DUTY GUARD RAIL

Handle-It® Safety Guard Rail is manufactured from 13 gauge high quality ASTM A1011 steel, making it a heavy-duty solution for guarding from fork truck impacts.

### FEATURES AND BENEFITS

- Tested to withstand impacts of 10,000 lbs at 4 mph
- Posts have pre-tapped holes on all four sides. Enables 90° turns without additional hardware or special posts
- Steel caps, floor anchors, and bolts included
- Columns are 4.75" x 4.75" square steel tube on 10" x 10" base plate. Center, offset, or corner footplates available
- Powder coated Handle-It yellow for a durable finish
- 43" tall double rails or 18" tall single rails
- Standard product stocked, custom lengths available by special order



### AREAS FOR INSTALL



Around  
Machines



In-Plant  
Offices





Pedestrian  
Walkways



End-Of-Racks

| Model No. | A           | B                           | C                                 |
|-----------|-------------|-----------------------------|-----------------------------------|
|           | Rail Length | Center to Center of Columns | Outside to Outside of Base Plates |
| GR-10     | 115"        | 120"                        | 130"                              |
| GR-9      | 103"        | 108"                        | 118"                              |
| GR-8      | 91"         | 96"                         | 106"                              |
| GR-7      | 79"         | 84"                         | 94"                               |
| GR-6      | 67"         | 72"                         | 82"                               |
| GR-5      | 55"         | 60"                         | 70"                               |
| GR-4      | 43"         | 48"                         | 58"                               |
| GR-3      | 31"         | 36"                         | 46"                               |
| GR-2      | 19"         | 24"                         | 34"                               |

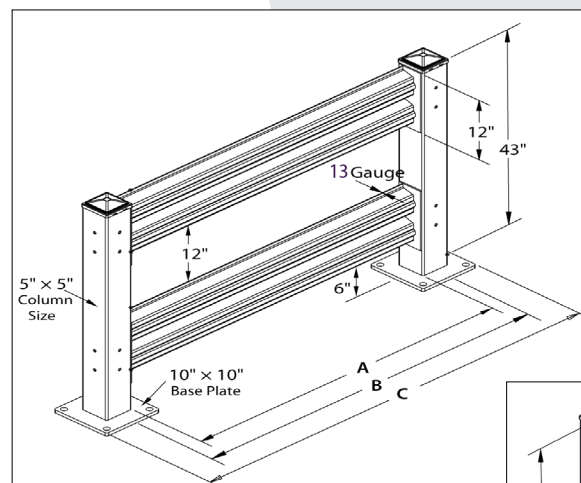





## ORDERING INFORMATION

| Model No.               | Description               | Weight (lbs.) | Rail Thickness | Rail Height |
|-------------------------|---------------------------|---------------|----------------|-------------|
| <b>Guard Rail</b>       |                           |               |                |             |
| GR-10                   | 10' Rail                  | 52            | 13 Gauge       | 12"         |
| GR-9                    | 9' Rail                   | 47            | 13 Gauge       | 12"         |
| GR-8                    | 8' Rail                   | 43            | 13 Gauge       | 12"         |
| GR-7                    | 7' Rail                   | 38            | 13 Gauge       | 12"         |
| GR-6                    | 6' Rail                   | 33            | 13 Gauge       | 12"         |
| GR-5                    | 5' Rail                   | 28            | 13 Gauge       | 12"         |
| GR-4                    | 4' Rail                   | 23            | 13 Gauge       | 12"         |
| GR-3                    | 3' Rail                   | 19            | 13 Gauge       | 12"         |
| GR-2                    | 2' Rail                   | 14            | 13 Gauge       | 12"         |
| <b>Standard Columns</b> |                           |               |                |             |
| CS-1                    | Single Rail Column        | 31            |                |             |
| CS-2                    | Double Rail Column        | 52            |                |             |
| CSO-1                   | Single Rail Offset Column | 31            |                |             |
| CSO-2                   | Double Rail Offset Column | 52            |                |             |
| CSC-1                   | Single Rail Corner Column | 31            |                |             |
| CSC-2                   | Double Rail Corner Column | 52            |                |             |
| <b>Special Options</b>  |                           |               |                |             |
| LOA                     | Lift-Out Adapter (Pair)   | 12            |                |             |
| DGA                     | Down Guard Adapter        | 13            |                |             |
| AA-45                   | Angle Adapter             | 12            |                |             |
| SG-3654A                | Adj. Pedestrian Gate      | 37            |                |             |
| GR-RHG                  | Rail Hinge Gate           | 56            |                |             |


All assembly, 3/4" anchoring hardware, and caps included. Bolt holes located on all four sides of the column.




Standard Column (CS)



Offset Column (CSO)




Corner Column (CSC)

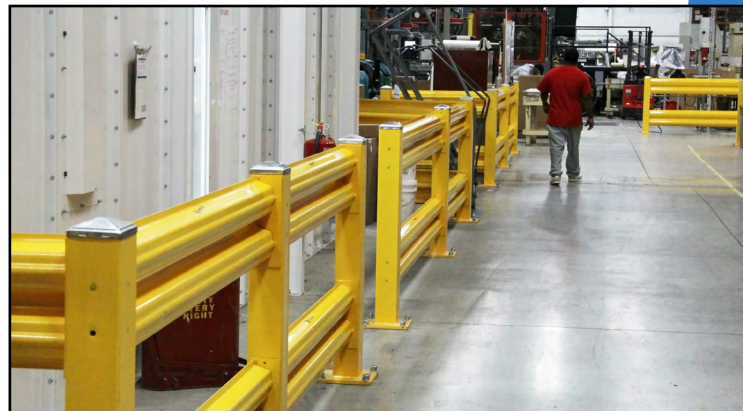

## Special Options



Lift-Out Adapter



45° Angle Adapter



Down-Guard Adapter

Adjustable Pedestrian Swing Gate  
(posts sold separately)Rail Hinge Gate  
(posts & rails sold separately)

## GUARD RAIL SPECIFICATION

To ensure proper protection, consider the following:

- Measure the overall length of the area to be protected.
- Is there a protruding object or other unusual configuration to measure? (i.e. going around corners, etc.)
- Is this a single, double rail application?
- Placing protection equipment a minimum of 12" in front of what you're protecting is required to achieve the proper protection.

